

STARZ ENTERTAINMENT DSR-4470 SERIES QUICK START GUIDE




RF INPUTS: Connect RF inputs as labeled below.

ASI OUTPUTS: Connect ASI (or optional* IP) outputs as labeled below.

SIGNAL LOCK: Enter frequency and modulation parameters in the Quick Install menu to gain signal lock.

AUTHORIZATION: Contact Starz Affiliate Support for signal authorizations. (888) 783-2275, Opt. #2

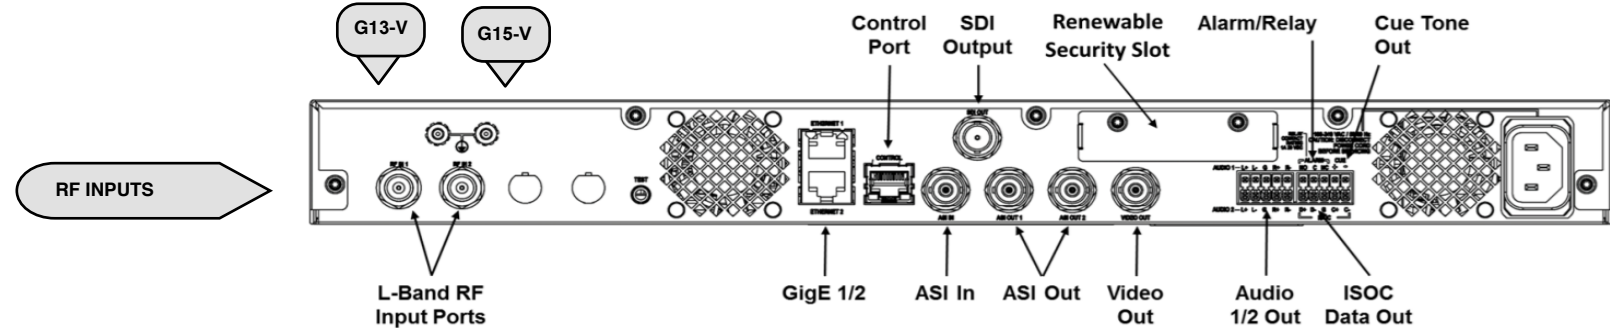

SIGNAL LOCK

Hit the "OK" button with "Quick Install" highlighted as shown.



Set and verify the following fields shown below:

QUICK INSTALL			
UA 1	000-11420-01681		
UA 2	000-11420-01682		
RF Port 1	1110.00	17	Transponder 17 or 20
DVBS2	32.500		Symbol Rate 32.500
Press OK to select			


Input Port RF Port 1 or RF Port 3
Modulation Mode DVBS2

AUTHORIZATION

Write down UA 1 and UA 2, as you will need these when calling 888-783-2275, Opt. #2 for authorization.



ANALOG HOOKUP INSTRUCTIONS

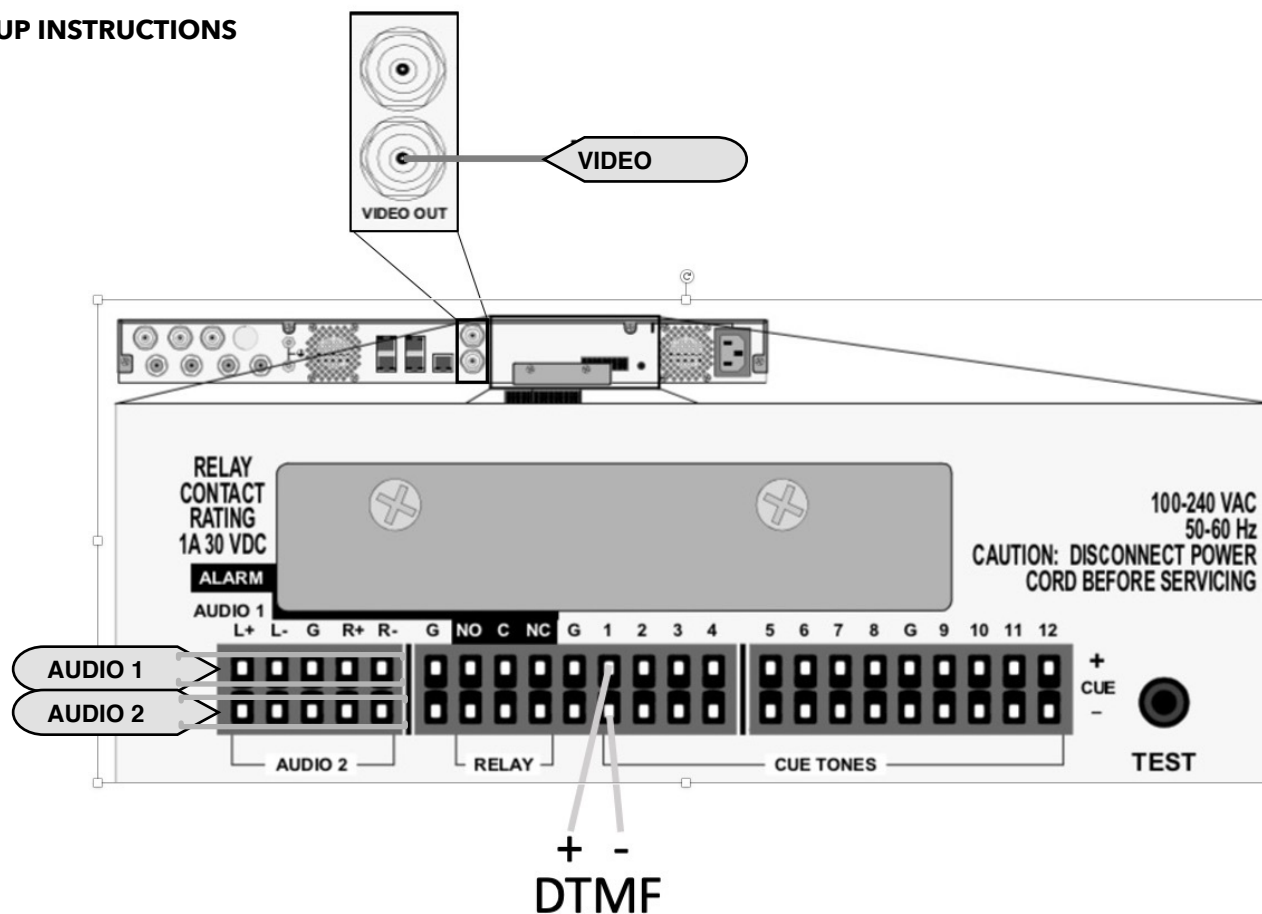

IF YOU WISH TO PURCHASE ADDITIONAL IRDs, PLEASE REACH OUT TO EITHER OF THE CONTACTS LISTED BELOW:

ARRIS authorized distributors:

Advanced Media Technologies

3150 SW 15TH Street

Deerfield Beach, FL 33442

Phone: 888.293.5856

Fax: 954.427.9688

Contacts: Ken Augustine and Neil Baruch

TVC Communications

10814 W. 78th St.

Shawnee, KS 66214

Phone: 800.932.1555

Fax: 913-962-1806

Contact: Brent Scott